

# CHRONO, BLACK/RED/BLUE, 2021

obj. č: 011.21001

Sugerowana cena

**6.759 zł**



## Specyfikacje techniczne

### produkowane rozmiary

S 395mm / M 430mm / L 470mm / XL 520mm

### waga

12,7 Kg

### rama

Chrono 29 6061 Xtralite Alloy butted, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable Routing, Boost 12x148mm rear axle

### widelec

RockShox Judy Silver TK 29, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x100mm axle, 30mm steel stanchions, 46mm offset. Settings: Poplock 2 pos remote compression (open/lock), rebound, air preload

### stery

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

### przerzutka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

### manetki

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

### klamki hamulca

Sram Level, tooled reach adjust, lever pivot bushings

### uchwyty

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

### support

Sram DUB BSA, sealed bearings, 73mm

### kierownica

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

### mostek

Onoff Sulfur, 6061 T6 Alloy, 31.8mm barbare, rise: +/-7, length: sizes S/M: 60mm, size L: 80mm, size XL: 90mm

### sztyca

Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm

### siodełko

Mondraker XC Series, steel rail

### piasta przednia

Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts

### tylna piasta

Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts, MS freehub

### łańcuch

Sram SX Eagle, 12s, Powerlock

### kaseta

Sram PG-1210, 11-50T, 12s

### szprychy

CN round stainless steel

### rafki

MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes

### obudowa

Kenda Slant Six 29x2.20, wire bead

### zamówienie numer

011.21001

### przedni hamulec

Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

### tylny hamulec


Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

### korba

34T, steel, X-Sync 2

### mocowanie przerzutki

Mondraker M074

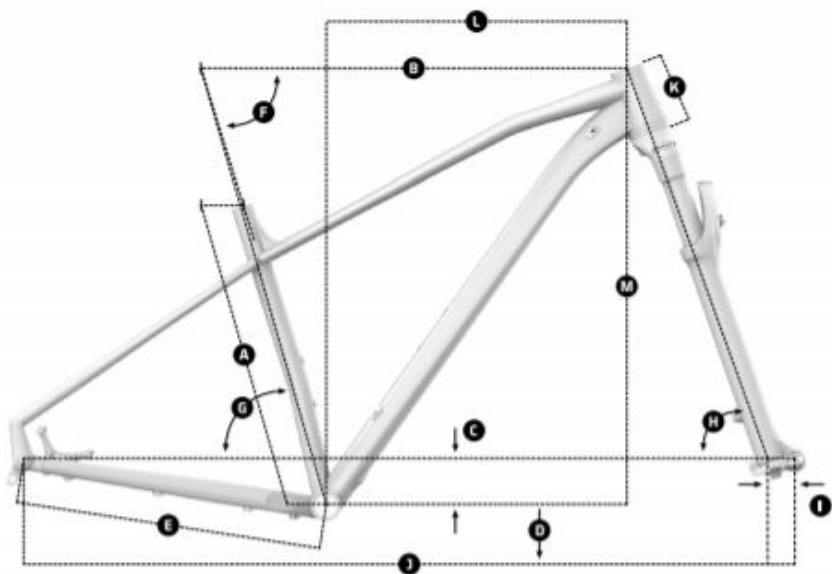

GEOMETRY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 395 mm  | 430 mm  | 470 mm  | 520 mm  |
| B Top Tube Length            | 590 mm  | 610 mm  | 630 mm  | 650 mm  |
| C Bottom Bracket Drop        | -65 mm  | -65 mm  | -65 mm  | -65 mm  |
| D Bottom Bracket Height      | 305 mm  | 305 mm  | 305 mm  | 305 mm  |
| E Chainstay Legth            | 435 mm  | 435 mm  | 435 mm  | 435 mm  |
| F Seat Tube Angle, Actual    | 72.5°   | 72.5°   | 72.5°   | 72.5°   |
| G Seat Tube Angle, Effective | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| H Head Tube Angle            | 70°     | 70°     | 70°     | 70°     |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1087 mm | 1107 mm | 1127 mm | 1148 mm |
| K Head Tube Length           | 100 mm  | 100 mm  | 110 mm  | 125 mm  |
| L Reach                      | 406 mm  | 426 mm  | 444 mm  | 460 mm  |
| M Stack                      | 618 mm  | 618 mm  | 628 mm  | 642 mm  |