

# CRAFTY CARBON R, CARBON/WHITE/RED, 2021

obj. č: 010.21259



## Specyfikacje techniczne

### produkowane rozmiary

S 380mm / M 420mm / L 450mm / XL 490mm

### waga

22 Kg

### rama

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

### widelec

Fox 36 29 Float FIT GRIP EVOL Performance, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

### stery

Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing

### przerzutka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

### manetki

Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click

### klamki hamulca

Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

### uchwyty

Race Face Aeffect, 165mm

### kierownica

Onoff Krypton 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

### mostek

Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare

### szttyca

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

### siodełko

Fizik Antares R7

### piasta przednia

DT 370, Boost 15x110mm, IS 6 bolts

### tylna piasta

DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts

### łańcuch

Sram NX Eagle, 12s, Powerlock

### kaseta

Sram XG-1230, 11-50T, 12s

### szprychy

DT Hybrid SP, straightpull

### rafki

DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes

### obudowa

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

### zamówienie numer

010.21259

### amortyzator

Fox Float DPS Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

### przedni hamulec

Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

### tylny hamulec

Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

**owijka**  
Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead


**korba**  
Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD

**silnik + akumulator**  
Bosch Performance Line CX Cruise (25Km/h) GEN4, computer  
Bosch Kiox, Bosch Powertube 625Wh

**regulacja amortyzatora**  
Medium compression, Medium rebound, 0.4 volume spacer

**mocowanie przerzutki**  
Mondraker M068

Geometria

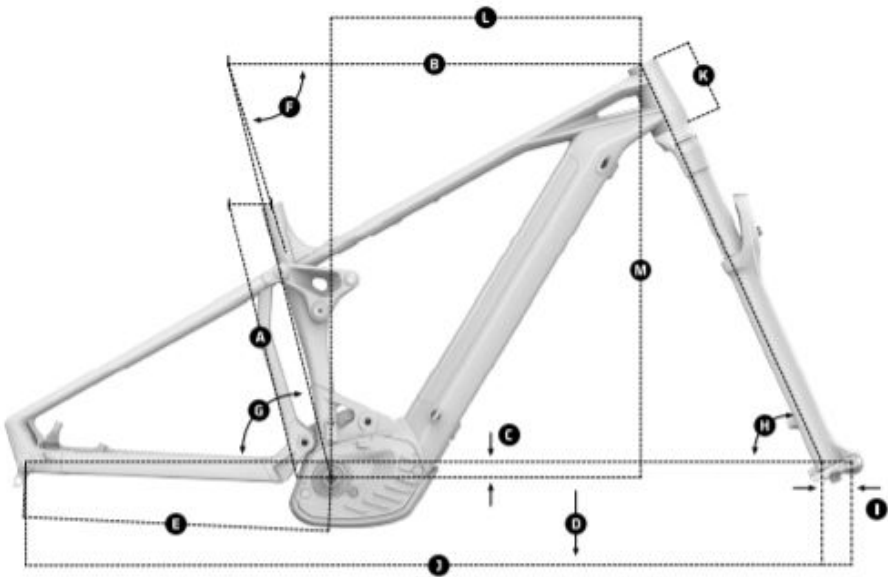

GEOMETRY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm  | 420 mm  | 450 mm  | 490 mm  |
| B Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| C Bottom Bracket Drop        | -25 mm  | -25 mm  | -25 mm  | -25 mm  |
| D Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| E Chainstay Legth            | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| F Seat Tube Angle, Actual    | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| G Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| H Head Tube Angle            | 65.5°   | 65.5°   | 65.5°   | 65.5°   |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1225 mm | 1245 mm | 1265 mm | 1285 mm |
| K Head Tube Length           | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| L Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| M Stack                      | 622 mm  | 622 mm  | 640 mm  | 640 mm  |