

CRAFTY CARBON R, CARBON/WHITE/RED, 2021

obj. č: 010.21259



Sugerowana cena

40.559 zł

Specyfikacje techniczne

produkowane rozmiary

S 380mm / M 420mm / L 450mm / XL 490mm

waga

22 Kg

rama

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

widelec

Fox 36 29 Float FIT GRIP EVOL Performance, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

stery

Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing

przerzutka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

manetki

Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click

klamki hamulca

Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

uchwyty

Race Face Aeffect, 165mm

kierownica

Onoff Krypton 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

mostek

Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare

szttyca

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

siodełko

Fizik Antares R7

piasta przednia

DT 370, Boost 15x110mm, IS 6 bolts

tylna piasta

DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts

łańcuch

Sram NX Eagle, 12s, Powerlock

kaseta

Sram XG-1230, 11-50T, 12s

szprychy

DT Hybrid SP, straightpull

rafki

DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes

obudowa

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

zamówienie numer

010.21259

amortyzator

Fox Float DPS Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

przedni hamulec
Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

owijka
Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

korba
Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD


silnik + akumulator
Bosch Performance Line CX Cruise (25Km/h) GEN4, computer
Bosch Kiox, Bosch Powertube 625Wh

tylny hamulec
Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

regulacja amortyzatora
Medium compression, Medium rebound, 0.4 volume spacer

mocowanie przerzutki
Mondraker M068

Geometria

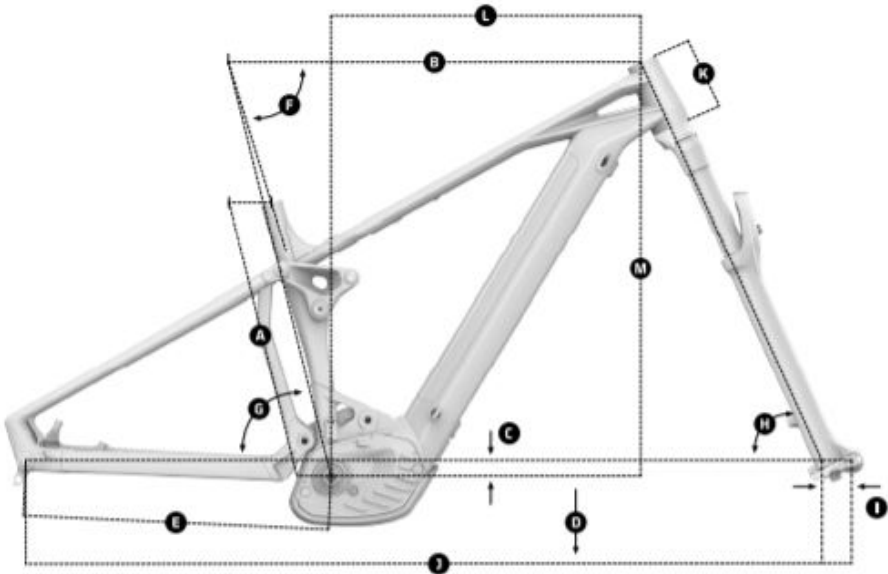

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm