

# CHRONO CARBON RR, CARBON/BLEU/BLEU, 2021

obj. č: 010.21021



Sugerowana cena

**15.599 zł**

## Specyfikacje techniczne

### produkowane rozmiary

S 395mm / M 430mm / L 470mm / XL 520mm

### waga

10,2 Kg

### rama

Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design

### widelec

Rockshox SID SL Ultimate RL 29, 100mm, Charger Race day, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload

### stery

Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

### przerzutka

Shimano XT M8100, SGS, Shadow+, 12s

### manetki

Shimano Deore M6100, Rapid Fire Plus, 12s

### klamki hamulca

Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings

### uchwyty

Shimano XT M8100 Boost, Hollowtech II, Q-factor 172mm, S size: 170mm, M/L/XL size: 175mm

### support

Shimano XT MT800 BSA, 68/73mm

### kierownica

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL /

### mostek

MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm

### sztyca

Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm

### siodełko

Mondraker XC Series, steel rail

### piasta przednia

DT 370, Boost 15x110mm, IS 6 bolts

### tylna piasta

DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub

### łańcuch

Shimano Deore M6100, 12s, Quick-link

### kaseta

Shimano Deore M6100, 10-51T Hyperglide+, 12s

### szprychy

DT Champion, straightpull

### rafki

DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes

### obudowa

Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

### zamówienie numer

010.21021

**przedni hamulec**  
Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad


**owijka**  
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

**mocowanie przerzutki**  
Mondraker M068

**tylny hamulec**  
Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

**korba**  
34T, CNC-machined alloy

Geometria

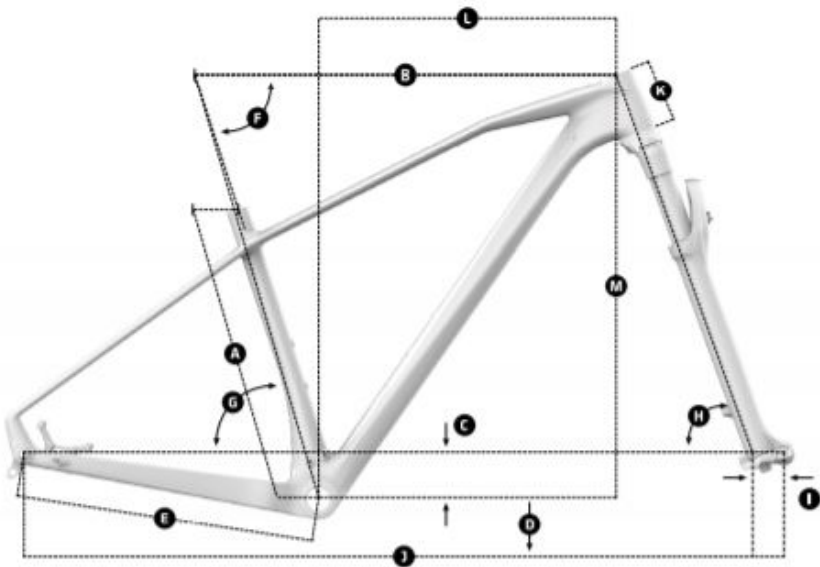

GEOMETRY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 395 mm  | 430 mm  | 470 mm  | 520 mm  |
| B Top Tube Length            | 590 mm  | 610 mm  | 630 mm  | 650 mm  |
| C Bottom Bracket Drop        | -65 mm  | -65 mm  | -65 mm  | -65 mm  |
| D Bottom Bracket Height      | 305 mm  | 305 mm  | 305 mm  | 305 mm  |
| E Chainstay Legth            | 430 mm  | 430 mm  | 430 mm  | 430 mm  |
| F Seat Tube Angle, Actual    | 72°     | 72°     | 72°     | 72°     |
| G Seat Tube Angle, Effective | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| H Head Tube Angle            | 70°     | 70°     | 70°     | 70°     |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1086 mm | 1106 mm | 1127 mm | 1148 mm |
| K Head Tube Length           | 85 mm   | 90 mm   | 100 mm  | 115 mm  |
| L Reach                      | 411 mm  | 430 mm  | 447 mm  | 463 mm  |
| M Stack                      | 605 mm  | 610 mm  | 619 mm  | 632 mm  |