

PODIUM CARBON RR, CARBON/RED/BLUE, 2021

obj. č: 010.21029



Sugerowana cena

31.199 zł

Specyfikacje techniczne

produkowane rozmiary

S 390mm / M 420mm / L 470mm / XL 510mm

waga

8,4 Kg

rama

Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,

widelec

Rockshox SID SL Ultimate RL 29, 100mm, Charger Race day, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload

stery

Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

przerzutka

Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

manetki

Sram Trigger GX Eagle, 12s, X-Actuation 1:1

klamki hamulca

Sram Level TLM, Direct Link actuation, tooled reach adjust, lever pivot bushings

uchwyty

Sram X01 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm

support

Sram DUB BSA, sealed bearings, 73mm

kierownica

Onoff Helium Carbon 0.2, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

mostek

MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm

sztyca

Onoff Helium Carbon 0-R VFLEX, diameter 27.2mm, length 400mm

siodełko

Fizik Antares R7

piasta przednia

Mavic Boost 15x110mm, IS 6 bolts

tylna piasta

Mavic Boost 12x148mm, 24T Ratchet system, IS 6 bolts, XD freehub

łańcuch

Sram GX Eagle, 12s, Powerlock

kaseta

Sram XG-1275, 10-50T, 12s

szprychy

Mavic steel butted, bladed, straightpull

rafki

Mavic Crossmax SLR Carbon 29, 26mm internal width, hookless, UST tubeless, 28 spokes

obudowa

Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

zamówienie numer

010.21029

przedni hamulec

Sram Level TLM, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

tylny hamulec


Sram Level TLM, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

owijka
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI,
folding bead

korba
34T, CNC-machined alloy, X-SYNC 2

mocowanie przerzutki
Sram UDH

Geometria

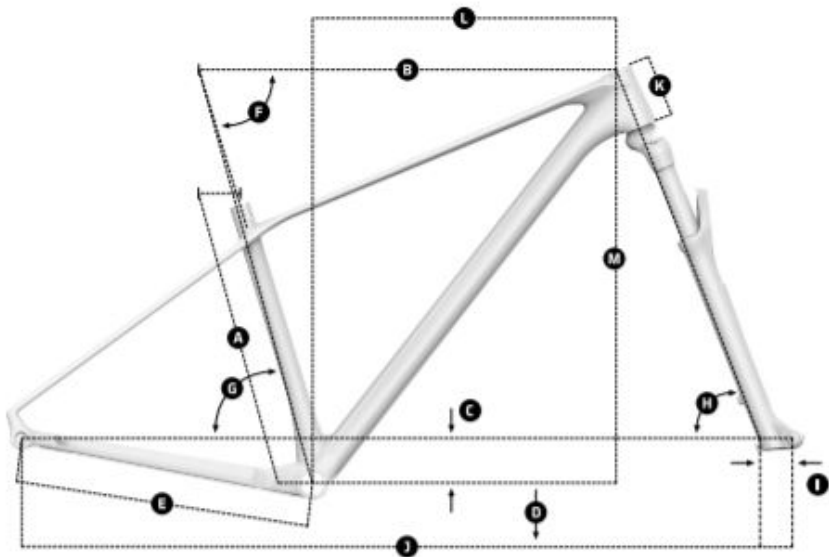

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	590 mm	611mm	632 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	73°	73°	73°	73°
G Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
H Head Tube Angle	68.5°	68.5°	68.5°	68.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1107 mm	1128 mm	1150 mm	1170 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	425 mm	444 mm	463 mm	477 mm
M Stack	598 mm	602 mm	611 mm	625 mm