

# SUPERFOXY R, SILVER/BLACK/RED, 2021

obj. č: 010.21097



## Specyfikacje techniczne

|                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>produkowane rozmiary</b><br>S 380mm / M 420mm / L 470mm / XL 510mm                                                                                                                                                                                                                                                                                   | <b>waga</b><br>15,8 Kg                                                                                                                                                                                          |
| <b>rama</b><br>SuperFoxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 160mm travel, Forward Geometry, one piece Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, Max. capacity sealed bearings, ISCG 05 | <b>widelec</b><br>Fox 38 29 Float FIT GRIP EVOL Performance, 170mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload |
| <b>stery</b><br>Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45                                                                                                                                                                                                                     | <b>przerzutka</b><br>Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1                                                                                                             |
| <b>manetki</b><br>Sram Trigger GX Eagle, 12s, X-Actuation 1:1                                                                                                                                                                                                                                                                                           | <b>klamki hamulca</b><br>Sram Code R, tool-free reach adjust                                                                                                                                                    |
| <b>uchwyty</b><br>Truvativ Descendant 7K Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size 170mm, L/XL size 175mm                                                                                                                                                                                                                          | <b>support</b><br>Sram DUB BSA, sealed bearings, 73mm                                                                                                                                                           |
| <b>kierownica</b><br>Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm                                                                                                                                                                                            | <b>mostek</b><br>Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore                                                                                                                                     |
| <b>szttyca</b><br>Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm                                                                                                                                                                                                              | <b>siodełko</b><br>SDG BEL-AIR 3.0, LPU foam, steel rails                                                                                                                                                       |
| <b>piasta przednia</b><br>DT 370, Boost 15x110mm, IS 6 bolts                                                                                                                                                                                                                                                                                            | <b>tylna piasta</b><br>DT 370, SuperBoost 12x157mm, 3 Pawl system, IS 6 bolts, XD freehub                                                                                                                       |
| <b>łańcuch</b><br>Sram NX Eagle, 12s, Powerlock                                                                                                                                                                                                                                                                                                         | <b>kaseta</b><br>Sram XG-1275, 10-52T, 12s                                                                                                                                                                      |
| <b>szprychy</b><br>DT Champion, straightpull                                                                                                                                                                                                                                                                                                            | <b>rafki</b><br>DT Swiss E1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes                                                                                                      |
| <b>obudowa</b><br>Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead                                                                                                                                                                                                                            | <b>zamówienie numer</b><br>010.21097                                                                                                                                                                            |
| <b>amortyzator</b><br>Fox Float X2 EVOL Performance, 205x65mm. Settings: Open/Firm, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings                                                                                                                                                                | <b>przedni hamulec</b><br>Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads                                                                |

**tylny hamulec**  
Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads


**regulacja amortyzatora**  
Medium compression, medium rebound, air volume

**mocowanie przerzutki**  
Mondraker M068

**owijka**  
Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

**korba**  
32T, CNC-machined alloy, X-SYNC 2

Geometria

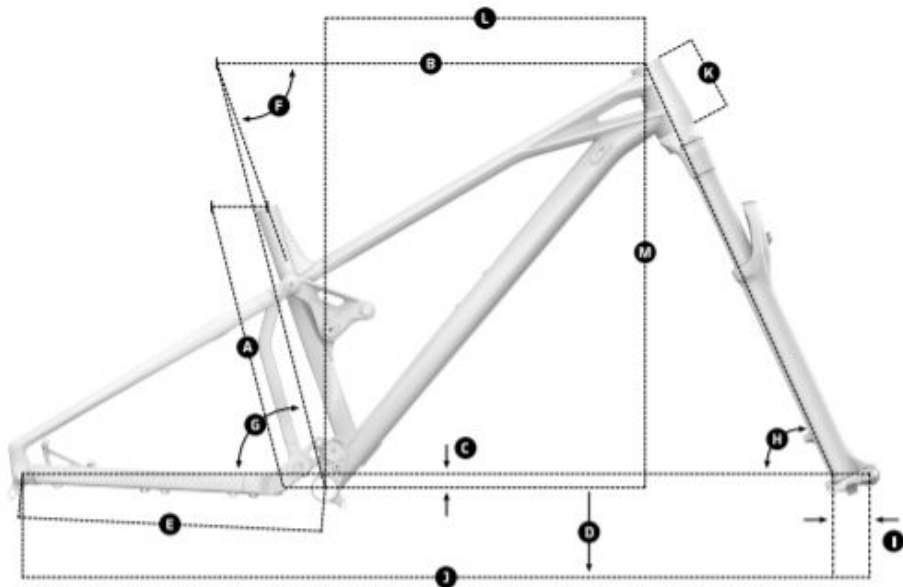

GEOMETRY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm  | 420 mm  | 470 mm  | 510 mm  |
| B Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| C Bottom Bracket Drop        | -20 mm  | -20 mm  | -20 mm  | -20     |
| D Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| E Chainstay Legth            | 445 mm  | 445 mm  | 445 mm  | 445 mm  |
| F Seat Tube Angle, Actual    | 71°     | 71°     | 71°     | 71°     |
| G Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| H Head Tube Angle            | 65°     | 65°     | 65°     | 65°     |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1224 mm | 1245 mm | 1273 mm | 1293 mm |
| K Head Tube Length           | 100 mm  | 110 mm  | 130 mm  | 130 mm  |
| L Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| M Stack                      | 621 mm  | 621 mm  | 639 mm  | 639 mm  |