

# FACTOR 26, SILVER/RED/BLACK, 2021

obj. č: 010.21127



Sugerowana cena

**10.399 zł**

## Specyfikacje techniczne

### produkowane rozmiary

One size 350mm

### waga

13,6 Kg

### rama

Factor 26 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 120mm travel, one piece bolt-on upper link, QR 9mm rear axle, 73mm BSA bottom bracket, HHG internal cable routing, dedicated 1x drivetrain design

### widelec

X-Fusion Velvet RL2 26, 120mm, Motion control, air spring, tapered steerer tube, 9x100mm axle, 32mm aluminum stanchions, 41mm offset. Settings: lockout, rebound, air preload

### stery

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

### przerzutka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

### manetki

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

### klamki hamulca

Shimano M4100, alloy lever, tooled reach adjust

### uchwyty

Sram SX Eagle, DUB axle, Direct mount chain ring, 155mm

### support

Sram DUB BSA, sealed bearings, 73mm

### kierownica

SDG Slater, double butted 6061 alloy, rise: 20mm, width: 650mm, 5 backsweep, 8 upsweep, 31.8mm bar bore with 4x19mm shims SDG Slater JR D19mm, 115mm

### mostek

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm bar bore

### szttyca

Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm

### siodełko

SDG Fly JR

### piasta przednia

Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts

### tylna piasta

Formula DC22LW 9x135mm, cup cone ball bearings, IS 6 bolts

### łańcuch

Sram SX Eagle, 12s, Powerlock

### kaseta

Sram PG-1230, 11-50T, 12s

### szprychy

CN round stainless steel

### rafki

MDK-XP1 26 TLR, 23mm internal width, tubeless ready, 32 spokes

### obudowa

Kenda Booster 26x2.4 single compound 30TPI, wire bead

### zamówienie numer

010.21127

### amortyzator

X-Fusion 02PRO R, 210x55mm. Settings: low-speed rebound, air preload. 45x8mm top and bottom bushings

### przedni hamulec

Shimano M410, RT56 160mm IS 6 bolts rotor, resin pads

### tylny hamulec

Shimano M410, RT56 160mm IS 6 bolts rotor, resin pads

### owijka


Kenda Booster 26x2.4 single compound 30TPI, wire bead

regulacja amortyzatora  
A-Tune light compression

korba  
30T, steel, X-Sync

mocowanie przerzutki  
Mondraker M073

Geometria

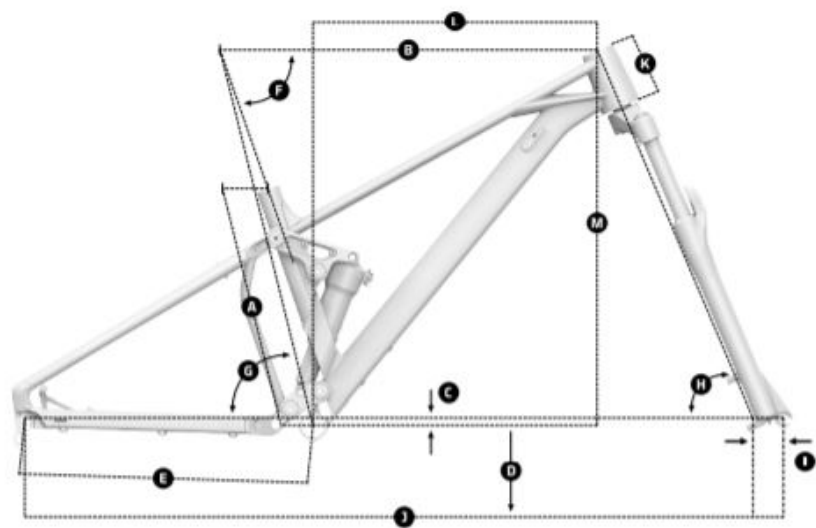

GEOMETRY

Size 26"

|   |                            |         |
|---|----------------------------|---------|
| A | Seat Tube Length           | 350mm   |
| B | Top Tube Length            | 550mm   |
| C | Bottom Bracket Drop        | -10 mm  |
| D | Bottom Bracket Height      | 320 mm  |
| E | Chainstay Legth            | 420 mm  |
| F | Seat Tube Angle, Actual    | 71°     |
| G | Seat Tube Angle, Effective | 76°     |
| H | Head Tube Angle            | 67°     |
| I | Fork Offset                | 41 mm   |
| J | Wheelbase                  | 1105 mm |
| K | Head Tube Length           | 90 mm   |
| L | Reach                      | 415 mm  |
| M | Stack                      | 545 mm  |