

DUSK RR, WHITE/BLUE/ORANGE, 2021

obj. č: 010.21310



Sugerowana cena


35.359 zł

Specyfikacje techniczne

produkowane rozmiary S 380mm / M 420mm / L 450mm / XL 490mm	waga 23 Kg
rama Dusk 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, integrated internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor. *Optional external battery	widelec Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
stery Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45	przerzutka Shimano XT M8100, SGS, Shadow+, 12s
manetki Shimano Deore M6100, Rapid Fire Plus, 12s	kłamki hamulca Shimano M6100, servo wave, alloy lever, tooled reach adjust
uchwyty Shimano STEPS EM600, 165mm	kierownica Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm
mostek Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare	szttyca Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
siodełko Mondraker e-MTB custom design	piasta przednia DT 370, Boost 15x110mm, IS 6 bolts
tylna piasta DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts	łańcuch Shimano Deore M6100, 12s, Quick-link
kaseta Shimano Deore M6100, 10-51T Hyperglide+, 12	szprychy DT Hybrid SP, straightpull
rafki DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes	obudowa Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
zamówienie numer 010.21310	amortyzator Fox Float DPS LV EVOL Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
przedni hamulec Shimano M6120, 4 piston caliper, RT66 203mm IS 6 bolts rotor, resin pads	tylny hamulec Shimano M6120, 4 piston caliper, RT66 203mm IS 6 bolts rotor, resin pads

owijka Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead	regulacja amortyzatora Medium compression, Medium rebound, 0.4 volume spacer
korba Shimano E8000 34T, steel, 104 BCD	mocowanie przerzutki Mondraker M068
silnik + akumulator Shimano STEPS EP800, computer Shimano STEPS E7000, Simplo internal 630Wh, Optional external battery: Simplo 360Wh	

Geometria

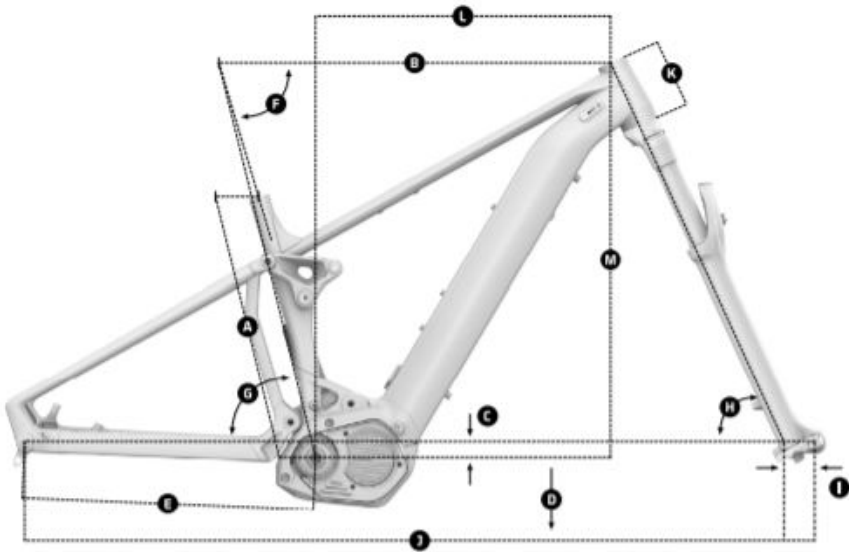

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm