

DUSK RR, WHITE/BLUE/ORANGE, 2021

obj. č: 010.21310



Specyfikacje techniczne

produkowane rozmiary

S 380mm / M 420mm / L 450mm / XL 490mm

waga

23 Kg

rama

Dusk 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, integrated internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor. *Optional external battery

widelec

Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

stery

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

przerzutka

Shimano XT M8100, SGS, Shadow+, 12s

manetki

Shimano Deore M6100, Rapid Fire Plus, 12s

klamki hamulca

Shimano M6100, servo wave, alloy lever, tooled reach adjust

uchwyty

Shimano STEPS EM600, 165mm

kierownica

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

mostek

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare

szttyca

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

siodełko

Mondraker e-MTB custom design

piasta przednia

DT 370, Boost 15x110mm, IS 6 bolts

tylna piasta

DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts

łańcuch

Shimano Deore M6100, 12s, Quick-link

kaseta

Shimano Deore M6100, 10-51T Hyperglide+, 12

szprychy

DT Hybrid SP, straightpull

rafki

DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes

obudowa

Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead

zamówienie numer

010.21310

amortyzator

Fox Float DPS LV EVOL Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

przedni hamulec


Shimano M6120, 4 piston caliper, RT66 203mm IS 6 bolts rotor, resin pads

tylny hamulec

Shimano M6120, 4 piston caliper, RT66 203mm IS 6 bolts rotor, resin pads

owijka Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead	regulacja amortyzatora Medium compression, Medium rebound, 0.4 volume spacer
korba Shimano E8000 34T, steel, 104 BCD	mocowanie przerzutki Mondraker M068
silnik + akumulator Shimano STEPS EP800, computer Shimano STEPS E7000, Simplo internal 630Wh, Optional external battery: Simplo 360Wh	

Geometria

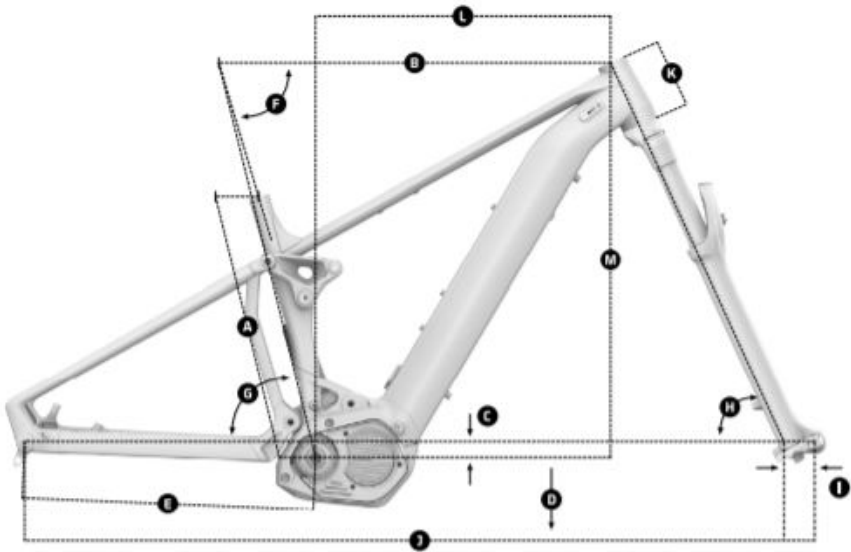

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm