

# CHRONO, WHITE/ORANGE/BLUE, 2021

obj. č: 011.21005


Sugerowana cena

**6.759 zł**



## Specyfikacje techniczne

|                                                                                                                                                                            |                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>produkowane rozmiary</b><br>S 395mm / M 430mm / L 470mm / XL 520mm                                                                                                      | <b>waga</b><br>12,7 Kg                                                                                                                                                                                                       |
| <b>rama</b><br>Chrono 29 6061 Xtralite Alloy butted, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable Routing, Boost 12x148mm rear axle | <b>widelec</b><br>RockShox Judy Silver TK 29, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x100mm axle, 30mm steel stanchions, 46mm offset. Settings: Poplock 2 pos remote compression (open/lock), rebound, air preload |
| <b>stery</b><br>Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45                                        | <b>przerzutka</b><br>Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1                                                                                                               |
| <b>manetki</b><br>Sram Trigger SX Eagle, 12s, X-Actuation 1:1                                                                                                              | <b>klamki hamulca</b><br>Sram Level, tooled reach adjust, lever pivot bushings                                                                                                                                               |
| <b>uchwyty</b><br>Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm                                                               | <b>support</b><br>Sram DUB BSA, sealed bearings, 73mm                                                                                                                                                                        |
| <b>kierownica</b><br>Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm             | <b>mostek</b><br>Onoff Sulfur, 6061 T6 Alloy, 31.8mm barbare, rise: +/-7, length: sizes S/M: 60mm, size L: 80mm, size XL: 90mm                                                                                               |
| <b>sztyca</b><br>Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm                                                                                 | <b>siodełko</b><br>Mondraker XC Series, steel rail                                                                                                                                                                           |
| <b>piasta przednia</b><br>Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts                                                                                      | <b>tylna piasta</b><br>Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts, MS freehub                                                                                                                          |
| <b>łańcuch</b><br>Sram SX Eagle, 12s, Powerlock                                                                                                                            | <b>kaseta</b><br>Sram PG-1210, 11-50T, 12s                                                                                                                                                                                   |
| <b>szprychy</b><br>CN round stainless steel                                                                                                                                | <b>rafki</b><br>MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes                                                                                                                                               |
| <b>obudowa</b><br>Kenda Slant Six 29x2.20, wire bead                                                                                                                       | <b>zamówienie numer</b><br>011.21005                                                                                                                                                                                         |
| <b>przedni hamulec</b><br>Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad                                               | <b>tylny hamulec</b><br>Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad                                                                                                   |
| <b>korba</b><br>34T, steel, X-Sync 2                                                                                                                                       | <b>mocowanie przerzutki</b><br>Mondraker M074                                                                                                                                                                                |

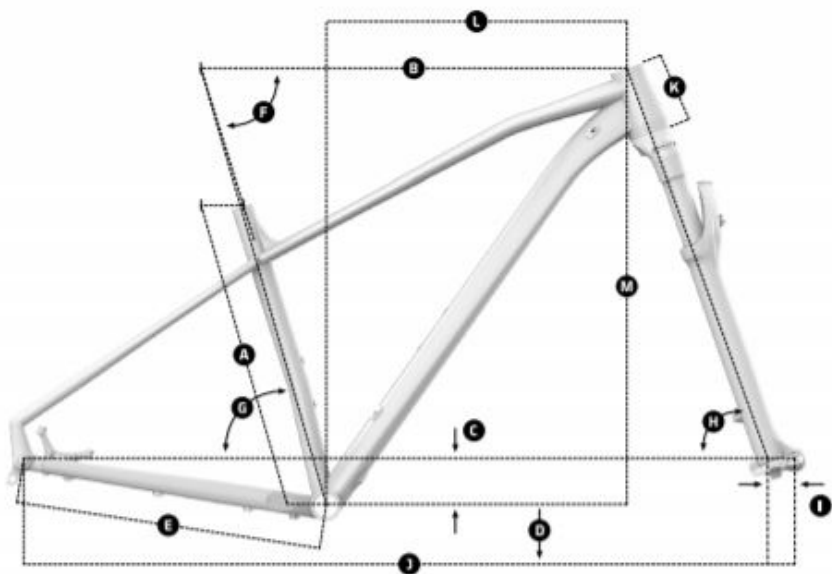

GEOMETRY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 395 mm  | 430 mm  | 470 mm  | 520 mm  |
| B Top Tube Length            | 590 mm  | 610 mm  | 630 mm  | 650 mm  |
| C Bottom Bracket Drop        | -65 mm  | -65 mm  | -65 mm  | -65 mm  |
| D Bottom Bracket Height      | 305 mm  | 305 mm  | 305 mm  | 305 mm  |
| E Chainstay Legth            | 435 mm  | 435 mm  | 435 mm  | 435 mm  |
| F Seat Tube Angle, Actual    | 72.5°   | 72.5°   | 72.5°   | 72.5°   |
| G Seat Tube Angle, Effective | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| H Head Tube Angle            | 70°     | 70°     | 70°     | 70°     |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1087 mm | 1107 mm | 1127 mm | 1148 mm |
| K Head Tube Length           | 100 mm  | 100 mm  | 110 mm  | 125 mm  |
| L Reach                      | 406 mm  | 426 mm  | 444 mm  | 460 mm  |
| M Stack                      | 618 mm  | 618 mm  | 628 mm  | 642 mm  |